



惠州宏利源电器有限公司
HONYONE ELECTRICAL APPLIANCE CO.,LTD

TS1

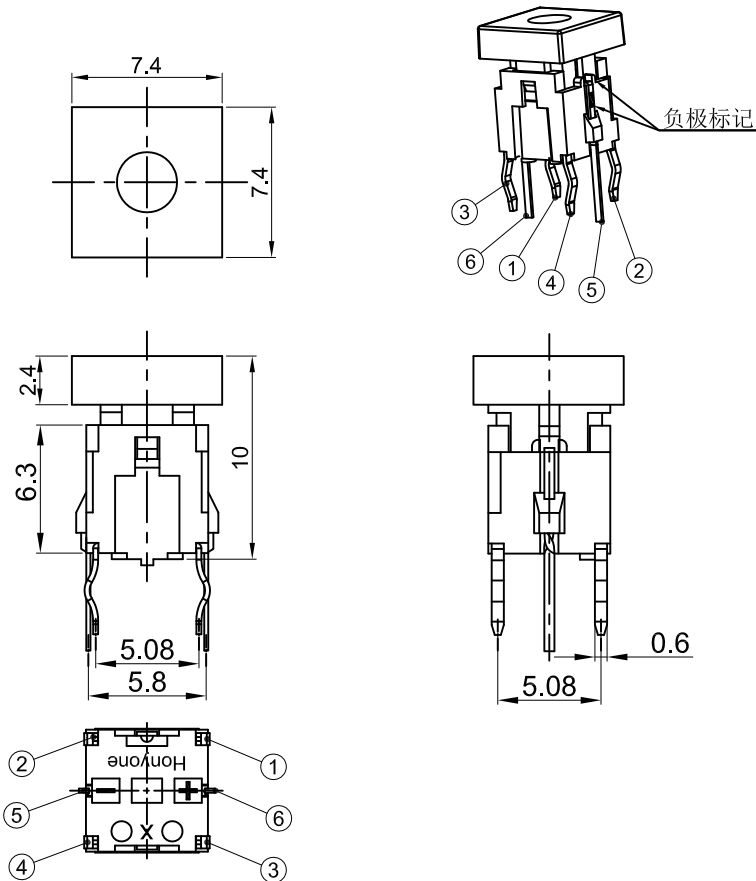


Switch Specifications

Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:30mΩ Max. (Initial)
Insulation resistance	:100MΩ Min.
Operating force	:250±50gf
	:180±50gf
Total travel	:0.25mm±0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:256° C for 5 seconds
Function	:Momentary
Operating temperature	:-20° C ~ +70° C

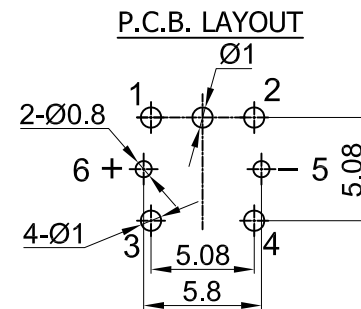

CIRCUIT



LED Specifications

W	白色	2.8	3.4	3.8	20
O	橙色	1.8	2.2	2.4	20
RU	蓝色	2.8	3.2	3.4	20
	红蓝色	1.8	2.2	2.4	20
U	蓝色	2.8	3.2	3.4	20
G	黄绿色	1.8	2.2	2.4	20
Y	黄色	1.8	2.2	2.4	20
R	红色	1.8	2.2	2.4	20
灯发光颜色 X Emitted color X	最小	一般	最大	最大操作电流 (mA)	
	顺向电压(V)				

MATERIAL:

Base Frame: Nylon66, UL rated:94 V-2 Min ;
Actuator: PBT, UL rated:94 V-0 Min. ;
Cap: ABS ;
Terminal: Brass, Silver or Tin plated .

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.	
A2	重新整理发行	2016. 07. 02	N/A	视 角		比 例 尺	NONE	日 期	2016. 07. 02	品 名	TITLE	图 号
A1	重新整理发行	2013. 03. 06	N/A	VIEWING ANGLE		SCALE		DATE				
A0	New Issue	2010. 12. 01	N/A	核 准	核 对	绘 图	TS1-00-2AX-0N-11S	TS1-00-2AX-0N-11S_A2				
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	李新超	CHECKED BY		饶品旺			