


惠州宏利源电器有限公司

HONYONE ELECTRICAL APPLIANCE CO.,LTD

TS1

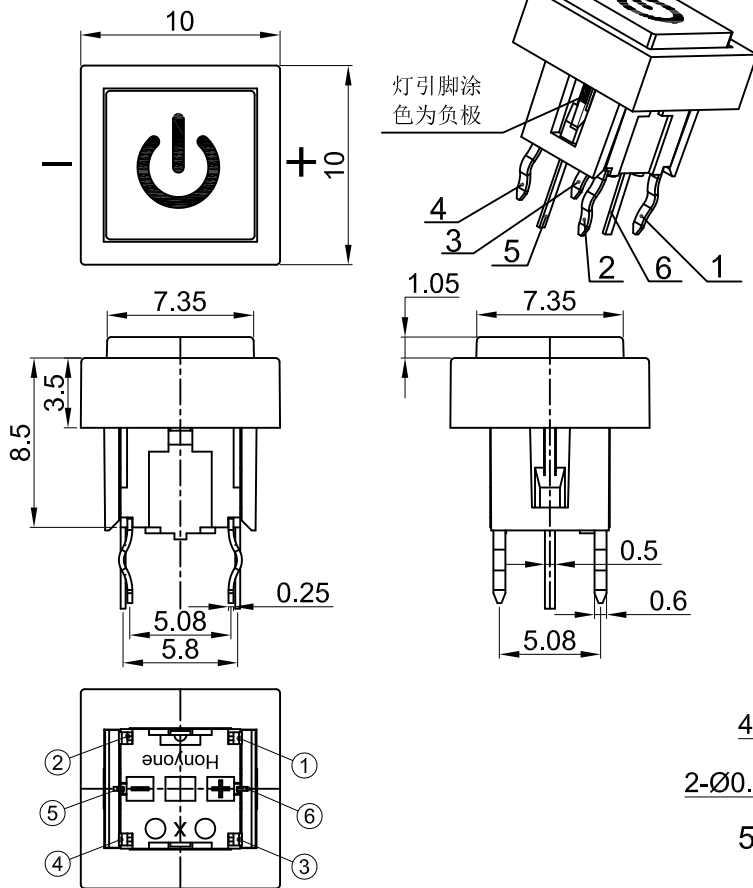

MATERIAL:

Base Frame: Nylon66, UL rated:94 V-2 ;
Outer Frame: Nylon66, UL rated:94 V-2;
Actuator: PBT, UL rated:94 V-0 ;
Cap: ABS ;
Terminal: Brass, Silver or Tin plated .

Switch Specifications

Circuit	:SPST
Current rating	:50mA
Voltage rating	:12VDC
Dielectric withstanding voltage	:250VAC for 1 minute
Contact resistance	:30m Ω Max. (Initial)
Insulation resistance	:100M Ω Min.
Operating force	:250±50gf :180±50gf
Total travel	:0.25mm±0.1mm
Operating life	:100,000 cycles Min
Solder specifications	:256° C for 5 seconds
Function	:Momentary
Operating temperature	:-20° C ~ +70° C

LED Specifications

W	白色	2.8	3.4	3.8	20
O	橙色	1.8	2.2	2.4	20
RU	蓝色	2.8	3.2	3.4	20
	红色	1.8	2.2	2.4	20
U	蓝色	2.8	3.2	3.4	20
G	黄绿色	1.8	2.2	2.4	20
Y	黄色	1.8	2.2	2.4	20
R	红色	1.8	2.2	2.4	20
灯发光颜色 X Emitted color X	最小	一般			最大
顺向电压(V)					
					最大操作电流 (mA)

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.		
				视 角		比例 尺		日 期		品 名	图 号		
A1	重新整理发行	2016. 07. 02	N/A	VIEWING ANGLE		SCALE	NONE	DATE	2016. 07. 02		TITLE		DRAWING NO
A0	New Issue	2015. 12. 21	N/A	核 准		核 对	饶品旺	绘 图	饶品旺		TS1-1B-1SX-1A-11S		TS1-1B-1SX-1A-11S_CP_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	李新超	CHECKED BY		DRAWN BY					